

# 1205C-1023




## Acousto-Optic Modulator for 1550nm

1106

### APPLICATION

The 1205C-1023 has been optimised for the best performance as an intensity modulator or frequency shifter in 1500nm-1600nm wavelength range.

### OUTLINE DRAWING

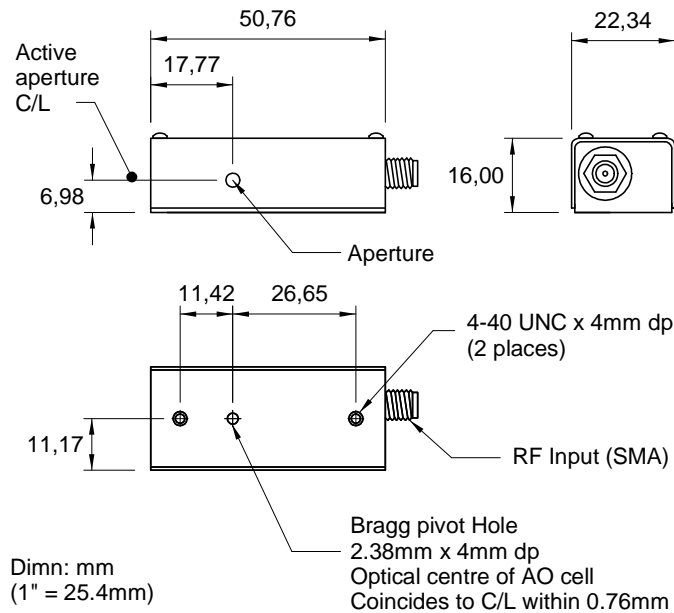

### RECOMMENDED DRIVERS

**522C-L or -2 (Digital Modulation)**  
**620C-80 (Variable Frequency & Digital Modulation)**

**532C-L or -2 (Analog Modulation)**  
**630C-80 (Variable Frequency & Analog Modulation)**


**ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

**Quality Assured.**  
**In-house: Crystal Growth,**  
**Optical Polishing,**  
**A/R coating, Vacuum Bonding**

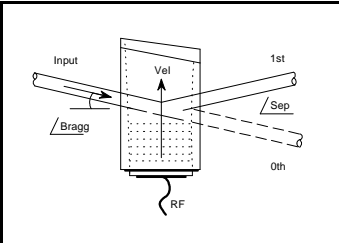

# 1205C-1023

## Acousto-Optic Modulator for 1550nm



1106

### SPECIFICATIONS

Standard Operating Wavelengths:	1550nm
Interaction Medium:	Lead Molybdate (PbMoO <sub>4</sub> )
Acoustic Velocity:	3.63mm/μs
Active Aperture:	0.6mm
Centre Frequency (CF):	80MHz
RF Bandwidth:	30MHz
Input Impedance:	50Ω Nominal
VSWR:	<1.5:1 @ 80MHz
DC Contrast Ratio:	>1000:1 min (>2000:1 typical)

### PERFORMANCE vs. WAVELENGTH

Wavelength (nm):	1550
RF Drive Power, 1205C-1:	1.8W maximum
Bragg angle (mrad):	17.1
Beam Separation (mrad):	34.2
Static Insertion Loss:	< 3% at 1550nm

### PERFORMANCE vs. BEAM DIAMETER

Beam Diameter (mm):	0.56	0.34
Rise Time (ns):	100	70
Modulation Bandwidth (MHz) @ MTF = 0.5:	3.5	5.0
Typical Deflection Efficiency (% at CF),		
1.2W drive power:	65	50
1.8W drive power:	75	65

**ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

**Quality Assured.**

**In-house: Crystal Growth,  
Optical Polishing,  
A/R coating, Vacuum Bonding**