

AOLF615-1049

Acousto-Optic Line Filter




0117

SOLID STATE

FAST ACCESS TIME

MINIMAL CHROMATIC DEFLECTION

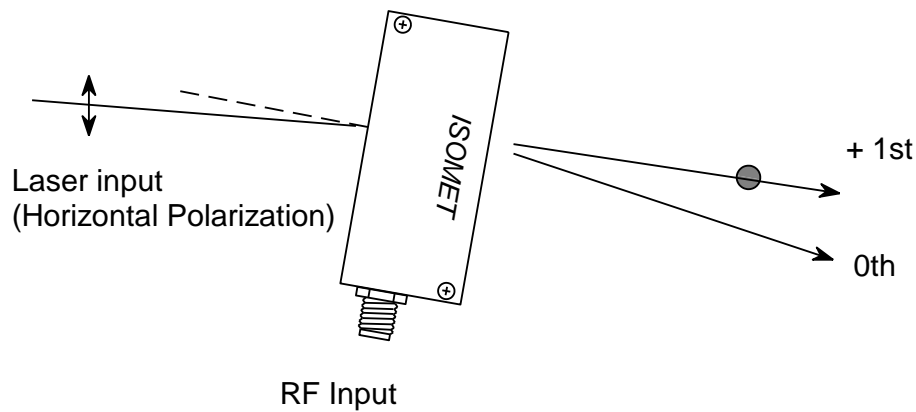

The AOLF range of acousto-optic tuneable (line) filters are specifically designed for use with laser sources. The wavelength of the diffracted light is selected according to the frequency of the RF drive signal. Isomet-grown tellurium dioxide (TeO_2), which has been oriented for off-axis mode operation, is utilised as the interaction material. Fast access times and fine spectral bandwidths make these filters ideal for selecting discrete lines from a multi-line laser sources.


For **horizontal** input polarization, the crystal geometry is designed to minimize chromatic beam deflection of the +1st output.

Suitable electronics include the Isomet iSPA-MF4 frequency synthesizer / power amplifier

Fibre coupling option is available.

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.
 Tel: (703) 321 8301 Fax: (703) 321 8546
 E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding



AOLF615-1049

Acousto-Optic Line Filter




0117

Specifications

Aperture	2.0mm x 2.0mm
Incidence Angle	5° nominal
Switching speed	< 1usec per mm beam dia.
Static insertion loss	< 5%
Diffraction efficiency	> 90% / line
Separation Angle (mrad)	89.2 mrad
Chromatic co-linearity	< +/- 0.15mrad

Wavelength (nm)	457	488	515	647
Frequency (MHz)	105.5	96	89	66
Bandwidth (nm)	2.5	3	3.7	7
RF Drive Power (mW)	<100	<120	<150	<200

Option -M: metric mounting screws M3

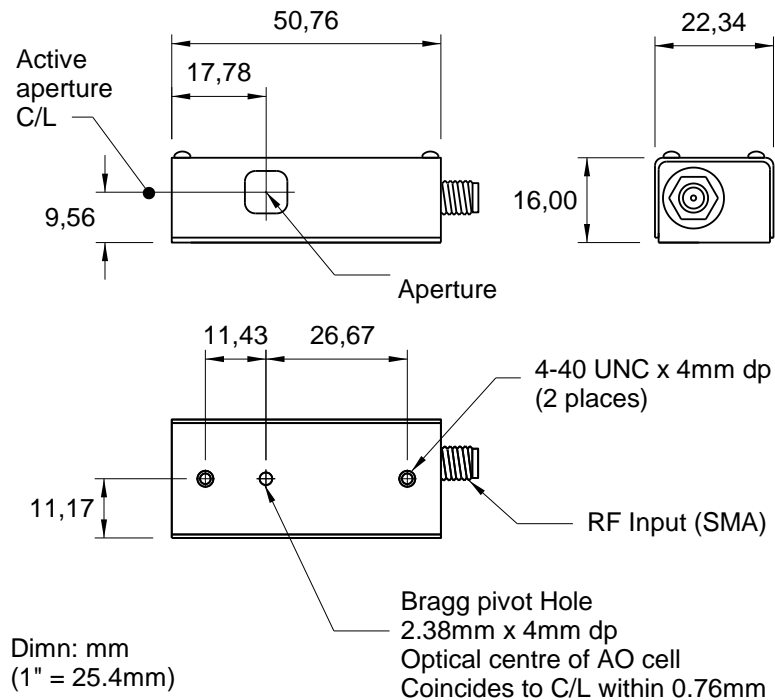

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

**In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding**