

# LS110A-NIR-(C)

## Acousto-Optic Modulator



0419


### APPLICATIONS

- Solid State Scanning of Visible and Infrared Lasers

### FEATURES


- High Resolution
- High Scan Speed
- No Moving Parts
- High Uniformity and Throughput across Scan

### OUTLINE DRAWING

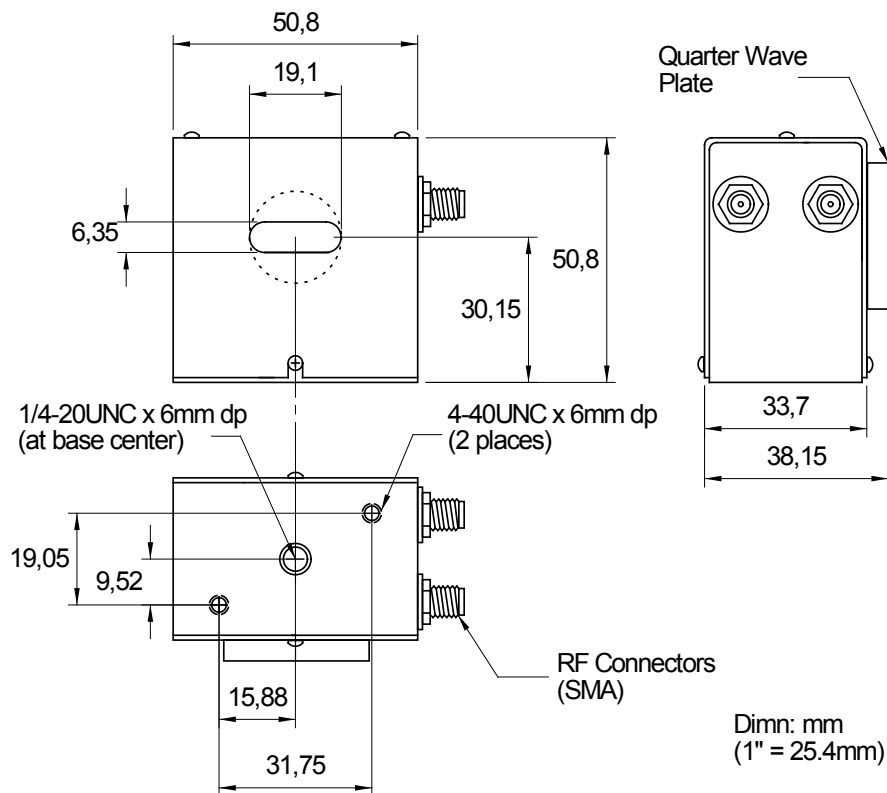

**ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**  
 ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.  
 Tel: (703) 321 8301 Fax: (703) 321 8546  
 E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

**Quality Assured.**  
 In-house: Crystal Growth,  
 Optical Polishing,  
 A/R coating, Vacuum Bonding



# LS110A-NIR-(C)

## Acousto-Optic Modulator



0419

### SPECIFICATIONS

	<u>LS110-830</u>	<u>LS110-1064</u>	<u>LS110(HF)-1.06</u>	<u>LS110-1.35</u>	<u>LS110-1.5</u>
Wavelength **::	830nm	1064nm	1064nm	1.35um	1.55um
Centre Freq. (Nom)	50MHz	50MHz	70MHz	50MHz	50MHz
Bandwidth Δf:	25MHz	25MHz	40MHz	25MHz	25MHz
Scan Angle/Axis:	1.9°	2.5°	3.95°	3.1°	3.6°
fc Separation Angle:	3.9°	4.9°	6.91°	6.2°	7.2°
Aperture	9.3mm / 14x4mm	9.3mm / 14x4mm	6.2mm / 14x4mm	14x4mm	14x4mm
Max Resolution:					
Circular aperture	375	375	400		
14x4mm aperture	550*	550*	880*	550*	550*
Throughput Efficiency	> 40%	> 40%	> 40%	> 30%	> 30%

#### Aperture:

LS110-xxxx-C  
LS110-xxxx

Circular (6.2mm or 9.3mm diameter)  
Elliptical 14mm W x 4mm H

#### Access Time (t):

(-C) 6.2mm circular aperture      10 μs  
(-C) 9.3mm circular aperture      15 μs  
14mm(h)x4mm(w) aperture      22.7 μs

Input Laser Polarization:      Linear. (Quarter wave plate included)

Output Laser Polarization:      Circular (Nominal)

Interaction Material:      TeO<sub>2</sub> (Slow Shear)

Acoustic Velocity:      0.617mm/μs

RF Input Impedance:      50Ω Nominal

### RF DRIVE ELECTRONIC OPTIONS

Fast tuning Synthesizer:      iMS4-L (or -P) synthesizer plus 801C-1 amplifiers

\* Theoretical Rayleigh resolution with uniformly illuminated aperture (14mm).

\*\* Please call for other operating wavelengths.

**ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**  
ISOMET CORP, 10342 Battlevue Parkway, Manassas, VA 20109, USA.  
Tel: (703) 321 8301      Fax: (703) 321 8546  
E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM)      Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

**Quality Assured.**  
In-house: Crystal Growth,  
Optical Polishing,  
A/R coating, Vacuum Bonding