

M1199-G50C-9

High Power AO Modulator/Deflector



0115

APPLICATIONS

- Material Processing
- Via Hole Drilling
- Surface texturing

FEATURES

- Low loss
- High Optical Power
- All Solid-State

The M1199-G50 series is an alternative to the AOM650 series. Both models are designed to minimize thermal lensing and reduce beam degradation at high powers pulsed systems. The M1199 differs in that the coolant is not in direct contact with the Germanium block. The M1199 can be used as a high power intensity modulator and/or medium resolution AO deflector.

SPECIFICATIONS (TYPICAL)

Operating Wavelength:	9 - 11 μ m (standard)	
Interaction Material:	Germanium	
Active Aperture:		
H=7	7mmH x 30mmW	
H=9	9mmH x 30mmW	
Centre Frequency (fc):	50MHz	
FM Bandwidth:	20MHz	
Diffraction Efficiency:	> 85% at fc, 90% typical	
RF Power for Max. D/E	< 150 Watts total	
Static Insertion Loss:	< 4%	
Maximum Optical Power:	600 Watts, 7mm dia. Gaussian beam	
	<u>9.4μm</u>	<u>10.6μm</u>
Bragg Angle:	42.7 mrad	48.3 mrad
Separation Angle:	85.5 mrad	96.5 mrad
Scan Angle (20MHz delta freq):	34.2 mrad	38.5 mrad
Laser Polarization:	Linear, Horizontal	
Water Cooling (Minimum):	2 Liter/Min. @ < 20°C	
<u>Modulator performance:</u> 7 mm beam diameter		
Diffraction Efficiency	> 85%	
Optical Rise Time	0.83 μ sec	
<u>Deflector Performance:</u> 7 x 30mm beam		
Diffraction Efficiency	> 80% across scan	
Access Time:	5.5 μ sec	
Resolution:	100	
<u>Drivers</u>		
Single spot Modulator:	RFA250-2 (50MHz)	
Dual spot modulator:	RFA4060-2	
Scan Line Deflector:	iHHS-2, RFA200-2	
Options:		
-BR: Brass case parts		
* : other wavelengths in the 2.5 μ m - 11.2 μ m range.		

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding

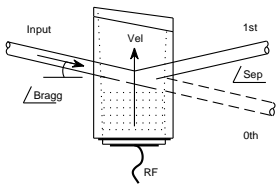


M1199-G50C-9

High Power AO Modulator/Deflector



0115

OUTLINE DRAWING

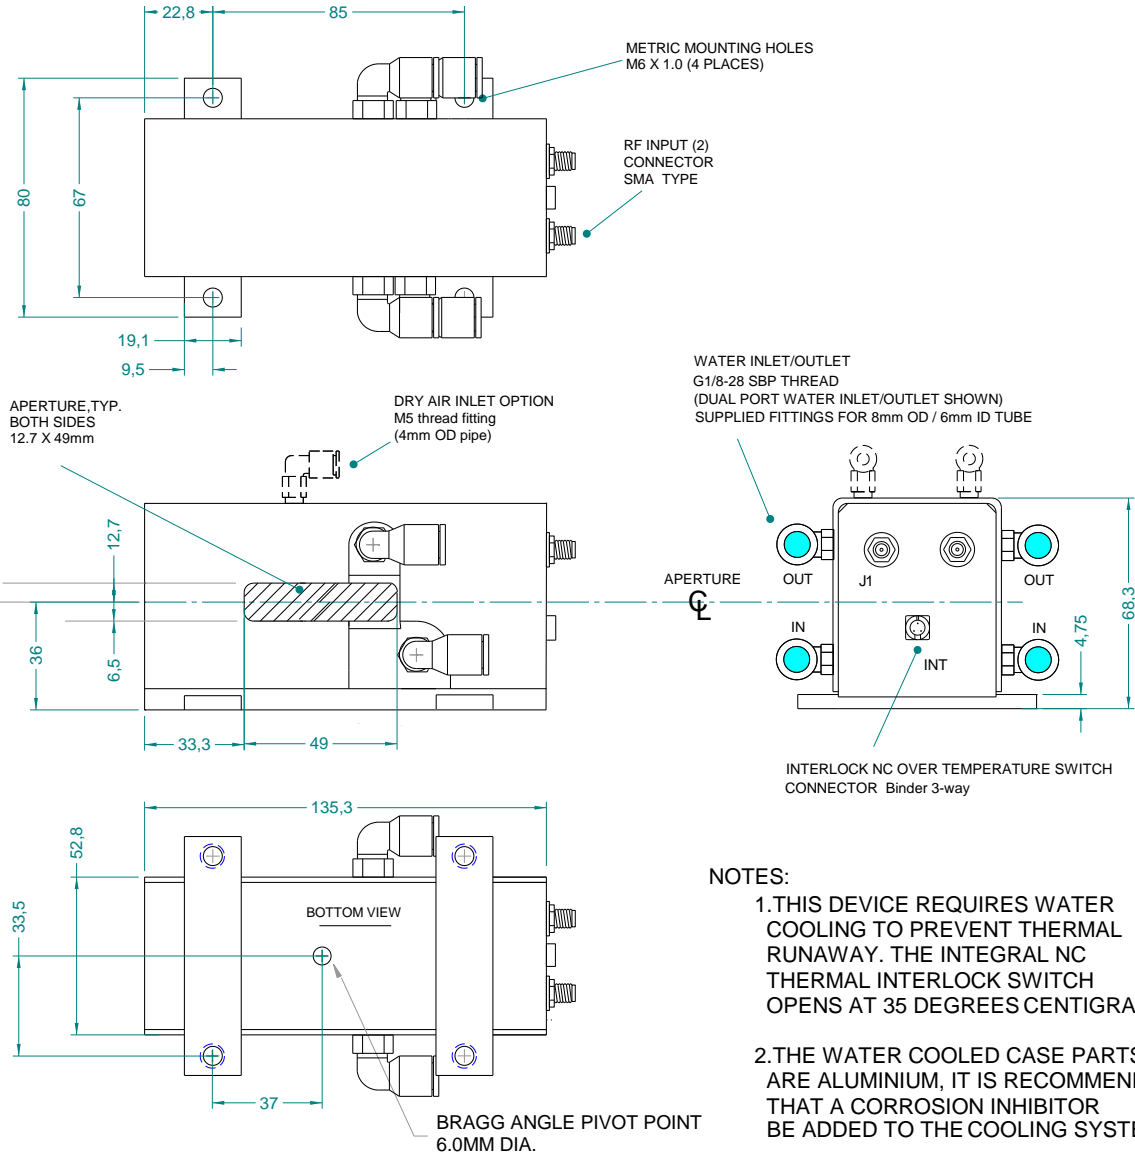

NOTES:

1. THIS DEVICE REQUIRES WATER COOLING TO PREVENT THERMAL RUNAWAY. THE INTEGRAL NC THERMAL INTERLOCK SWITCH OPENS AT 35 DEGREES CENTIGRADE.
2. THE WATER COOLED CASE PARTS ARE ALUMINIUM, IT IS RECOMMENDED THAT A CORROSION INHIBITOR BE ADDED TO THE COOLING SYSTEM.

Refer application note AN0901 regarding Coolant Specification

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding