

M1212-aQ175-1-(A/R)

Acousto-Optic Modulator

for use with UV LASERS



1114

SPECIFICATIONS

A/R Operating Wavelength*:	248nm, 325-364nm
Material:	Quartz
Acoustic velocity:	5.7mm/usec
Center Frequency:	175 MHz
RF Bandwidth	40 MHz
Diffraction Efficiency:	> 85%
Input Impedance:	50Ω(Nominal)
Input VSWR:	< 1.5:1 @ 175MHz
Active Aperture:	1.0mm
Optical Insertion Loss:	< 6%
Reflectivity:	< 1.0%/Surface
DC Contrast Ratio:	>1000:1 min (2000:1 typical)
Laser Polarization:	Vertical, Perpendicular to Base
Outline Dimensions:	(See Reverse Side)

PERFORMANCE vs. WAVELENGTH

Wavelength (nm):	248	325	355	363
RF Drive Power (Watts):	1.4	2.4	2.0	3.0
Bragg Angle (mrad):	3.8	5.0	5.5	5.6
Separation Angle (mrad):	7.6	10.0	10.9	11.1

PERFORMANCE vs. BEAM DIAMETER at 355nm

Beam Diameter (mm):	1.0	0.25	0.15
Risetime (nsec):	112	30	20
Video Bandwidth (MHz):	3	12	18
Diffraction efficiency (typ %): for 2.5W RF driver power	85	80	75

(* other UV wavelengths on request)

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

**In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding**

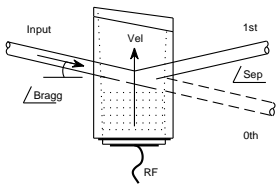

M1212-aQ175-1-(A/R)


Acousto-Optic Modulator

for use with UV LASERS



1114

OUTLINE DRAWING

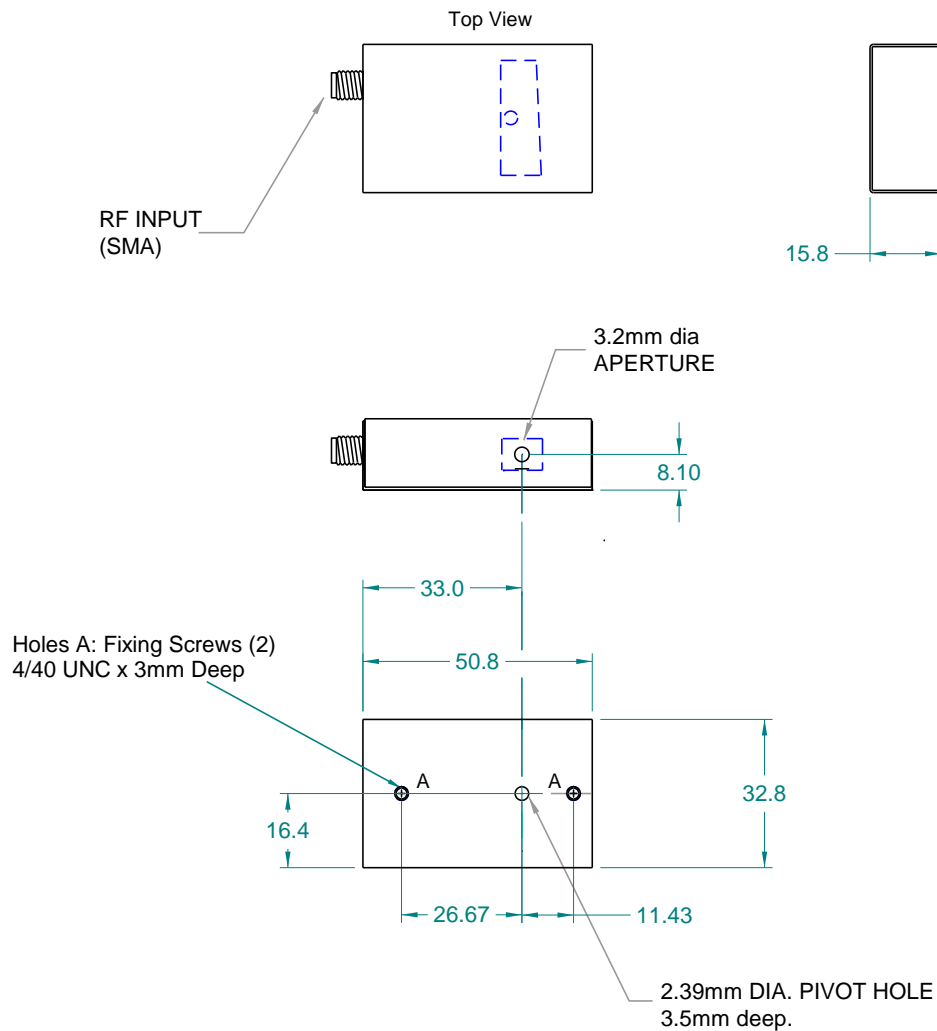

Suggested RF Drive Electronics:

Digital modulation	525C-3-175
Analog modulation	535C-3-175
Tuneable with modulation	iSPA-SF1-e

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding