

OAD1344-XY-75



Dual Axis AO Deflector

Off-Axis

0915

The OAD1344-XY offers high throughput efficiency over a wide scan angle in the NIR wavelength range. This dual axis deflector consists of two AO deflector crystals mounted orthogonally in one assembly, each with independent angle adjustment. There is no requirement for input or intervening optics between the crystals.

SPECIFICATIONS


A/R Wavelength:	800-1000nm
Optimum operation range:	830-920nm
Interaction Material:	TeO ₂ (off-axis shear)
Acoustic Velocity:	681m/s
Center Frequency (f _c):	60 -75MHz (wavelength dependent)
RF Bandwidth:	45MHz
Diffraction Bandwidth (to -0.5dB points):	>25MHz, 30MHz typical
Scan Angle/Axis (880nm, 30MHz):	2.2°
Separation Angle (880nm, 68MHz):	5°

Input polarization (required):	Linear, horizontal w.r.t. base
Output polarization:	Linear, horizontal w.r.t. base
Active Aperture:	9mm x 9mm
Max RF Power:	3.0W/axis (nominal)
Input impedance:	50 ohm

Access Time (9mm beam):	13.2usec
Resolution (9mm beam)	395 x 395 resolvable spots
(Non-resolvable spots limited by RF driver frequency resolution)	

Efficiency across scan	80% (typ'), >60% per axis
Throughput efficiency	>35% total

Relative Diffraction Response vs Frequency (per axis)

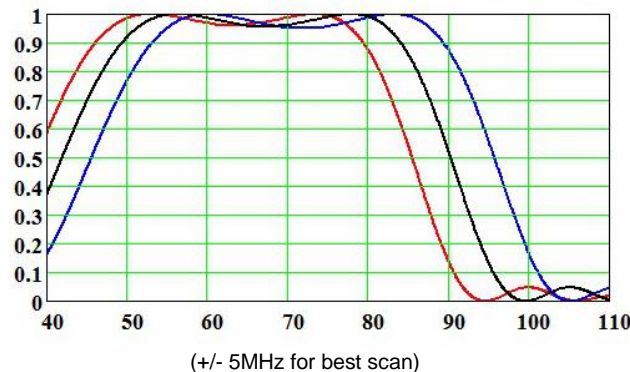

830 ———
 880 ———
 930 ———

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546


E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: Crystal Growth,

Optical Polishing,

A/R coating, Vacuum Bonding

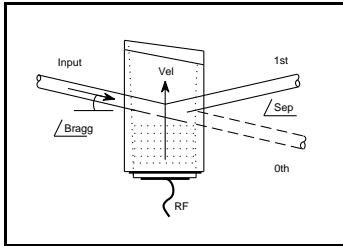


OAD1344-XY-75



Dual Axis AO Deflector Off-Axis

0915

OUTLINE DRAWING

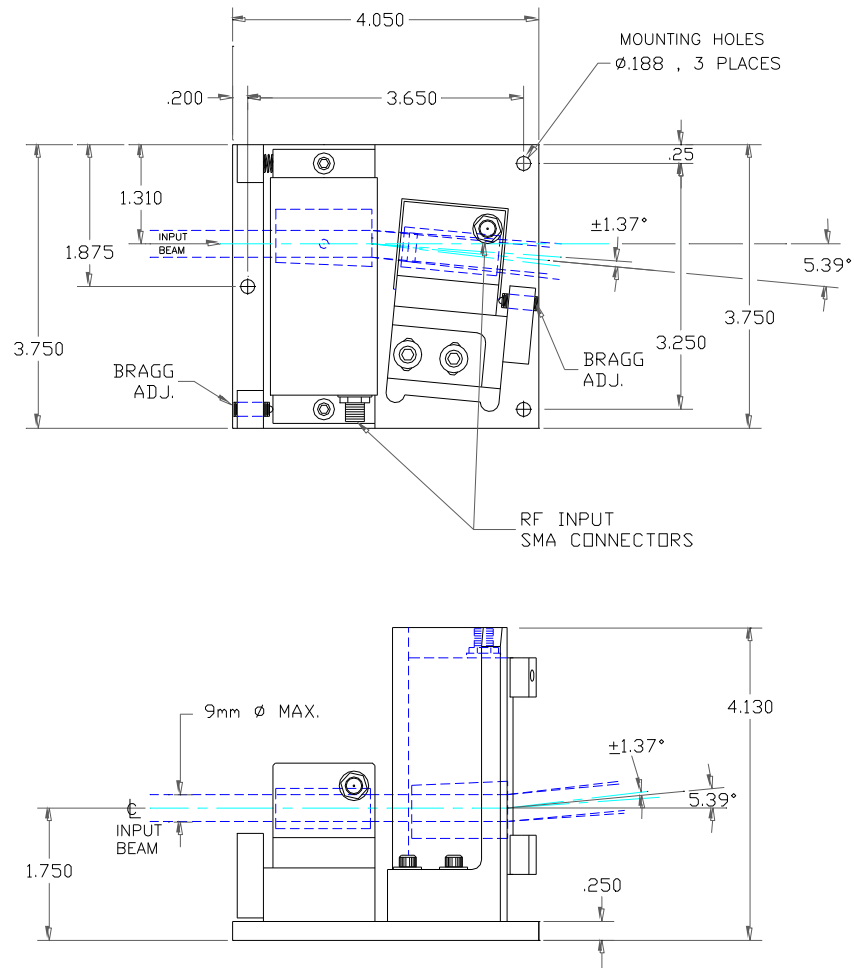

(Angles for guidance only. Values depend on model variant, wavelength and centre frequency used)

Recommended Drive Electronics

1 x iMS4 Frequency Synthesizer and 2 x 502C-3 Amplifier
or
2 x 620C/630A-80 Variable Frequency Driver

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: Crystal Growth,

Optical Polishing,

A/R coating, Vacuum Bonding