

OAM1020-T100S-3

Acousto-Optic Modulator

Off-Axis



0419

The OAM1020 is a high efficiency laser beam modulator, offering wide beam separation and >200KHz modulation bandwidth. Specific input beam polarization and orientation are required for correct operation.

SPECIFICATIONS

Operating Wavelength:	532nm
Interaction Material:	TeO ₂ (Off-Axis Mode)
Acoustic Velocity:	650 m/s (Nominal)
Active Aperture:	3mm
Centre Frequency (f _c)	110MHz
RF Bandwidth (Δf)	50MHz
Input Impedance:	50Ω (Nominal)
VSWR:	< 1.5 :1 at f _c
Laser Polarization:	Linear, Horizontal
Optical Power:	< 5W

PERFORMANCE

Wavelength (nm):	532
RF Drive Power (Watts):	<0.8
Bragg Angle (mrad @ 110MHz)	5.9° (Nominal)
Beam Separation (mrad) @ 110 MHz:	5.0°
Diffraction Efficiency	≥85% min, >90% typ
Static Insertion loss	<3% max, <2% typ

RECOMMENDED DRIVER


Model 523C-L (Digital Modulation)

Model 533C-L (Analog Modulation)

Model 553F-L (Dual Modulation)

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 ISOMET CORP, 10342 Battleview Parkway, Manassas, VA 20109, USA.
 Tel: (703) 321 8301 Fax: (703) 321 8546
 E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
 In-house: Crystal Growth,
 Optical Polishing,
 A/R coating, Vacuum Bonding

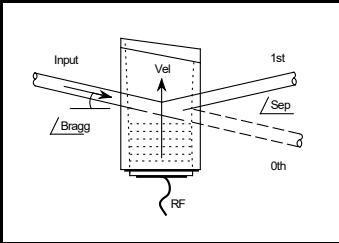

OAM1020-T100S-3




Acousto-Optic Modulator


Off-Axis

0419

OUTLINE DRAWING

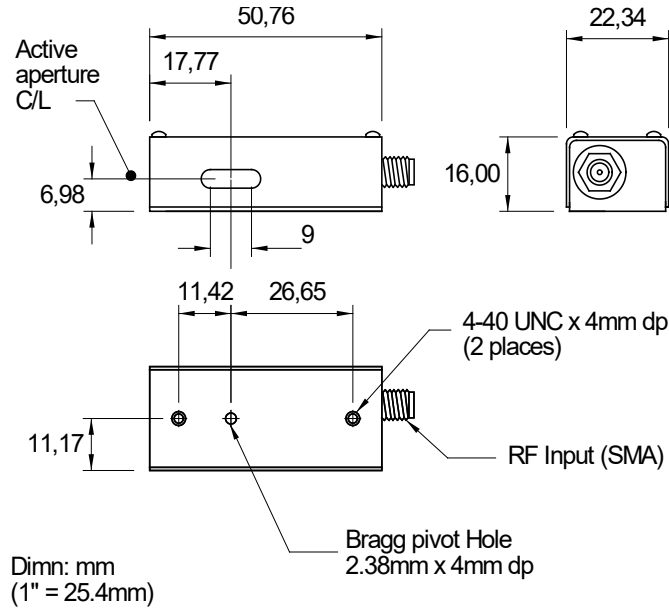

ORIENTATION

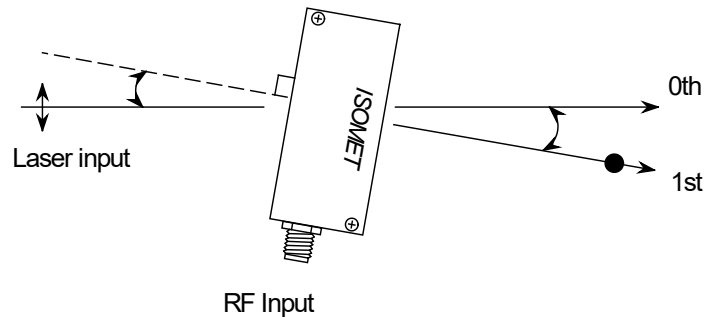

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 ISOMET CORP, 10342 Battleview Parkway, Manassas, VA 20109, USA.
 Tel: (703) 321 8301 Fax: (703) 321 8546
 E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
 In-house: Crystal Growth,
 Optical Polishing,
 A/R coating, Vacuum Bonding