

# 1211-5-UV

## UV Acousto-Optic Modulator/Deflector



1106

### SPECIFICATIONS

Operating Wavelength:	330-360nm (singly or combined)
Centre Frequency (fc):	110MHz
RF Bandwidth:	20MHz
Diffraction Efficiency:	>85% (90% typical)
Input Impedance:	50Ω(Nominal)
Input VSWR:	<1.5:1 @ 110MHz
Active Aperture:	5mm (Nominal)
Optical Insertion Loss:	<3% (<2% typical)
Reflectivity:	<0.5%/Surface
DC Contrast Ratio:	>1000:1 min (2000:1 typical)
Laser Polarization:	Vertical, Perpendicular to Base
Water Cooling (Min):	250ml/minute @ 25 deg C
Outline Dimensions:	(See reverse side)

### PERFORMANCE vs. WAVELENGTH

Wavelength (nm):	355
RF Drive Power (Watts):	9.0
Bragg Angle (mrad):	3.4
Separation Angle (mrad)	6.8

### PERFORMANCE vs. BEAM DIAMETER

Beam Diameter (mm):	5.0	2.0	1.0
Risetime (nsec):	570	227	113
Video Bandwidth (MHz):	0.7	1.5	3

The 1211 UV has been designed specifically for high beam pointing stability and low dynamic wavefront distortion.

### RF Drive Electronics

RFA2110 (water cooled) or RFA910-110 (air cooled)

#### **ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

#### **Quality Assured.**

**In-house: Crystal Growth,  
Optical Polishing,  
A/R coating, Vacuum Bonding**




# 1211-5-UV

## UV Acousto-Optic Modulator/Deflector



1106

### OUTLINE DRAWING

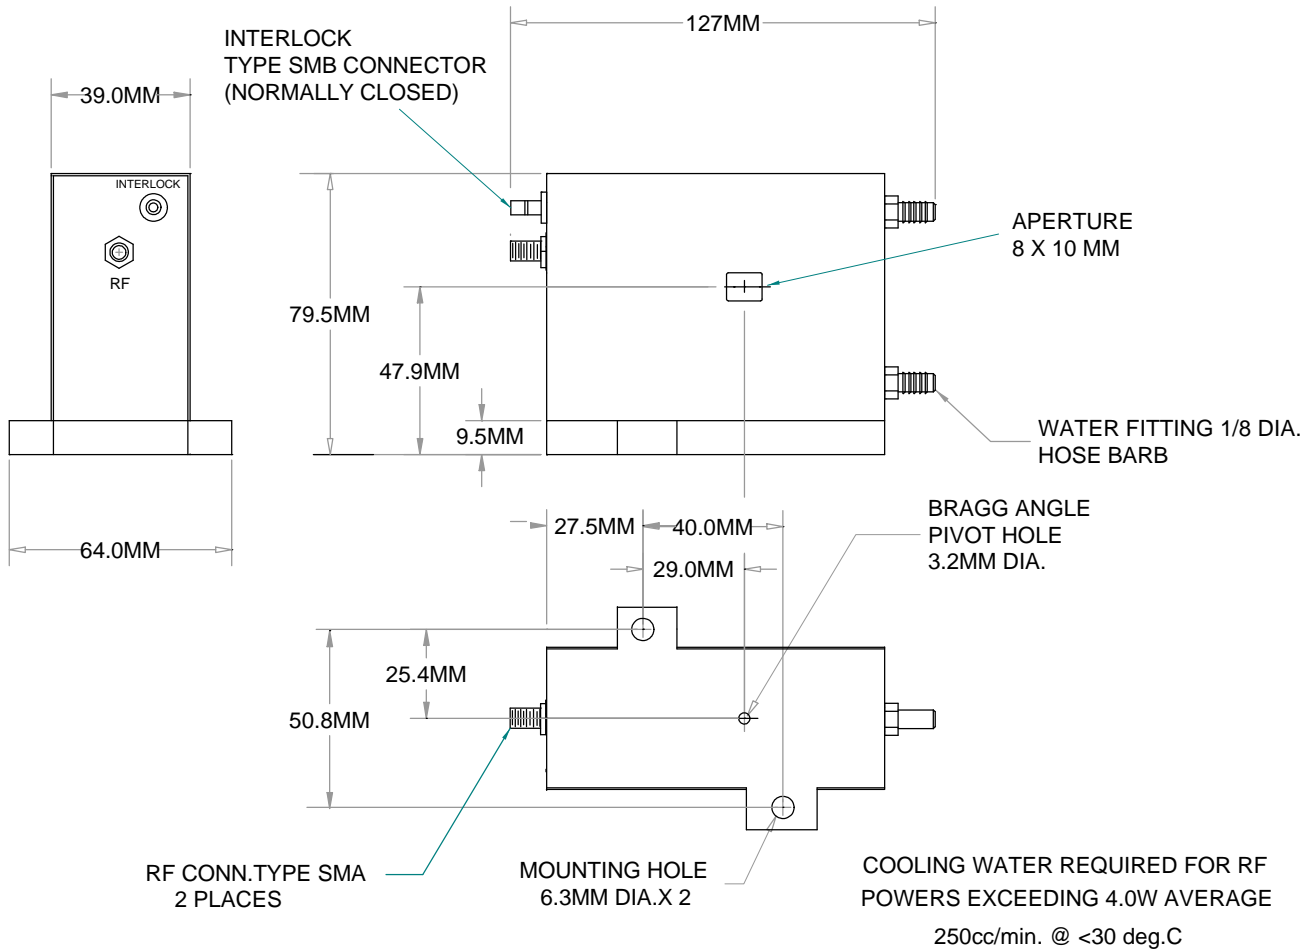

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

Quality Assured.

In-house: Crystal Growth,  
Optical Polishing,  
A/R coating, Vacuum Bonding