

1250C-868

NIR Acousto-Optic Modulator



1106

The 1250C-868 design has been optimised for the best performance as an intensity modulator or frequency shifter in the NIR wavelength region of 1 –1.2um.

SPECIFICATIONS

Operating Wavelength:	1.06µm *
Interaction Material:	Tellurium Dioxide (TeO ₂)
Active Aperture (mm):	0.50
Centre Frequency (fc):	150MHz
Tuned RF Bandwidth (Δf):	50MHz
Diffraction Efficiency (%):	≥ 50.0 **
RF Power Input	< 2.0 Watts
Static Insertion Loss (%):	≤ 3.0
Bragg Angle (mrad):	19.0
Separation Angle (mrad):	38.0
D.C. Contrast Ratio:	>1000:1 min (2000:1 typical)

* Other NIR wavelengths available

** Limited by maximum RF power dissipation

RECOMMENDED RF DRIVE ELECTRONICS:

Model 524C-2 (Digital Modulation)

Model 534C-2 (Analog Modulation)

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding




1250C-868

NIR Acousto-Optic Modulator




1106

TYPICAL PERFORMANCE vs. BEAM DIAMETER (RF drive = 2.0W)

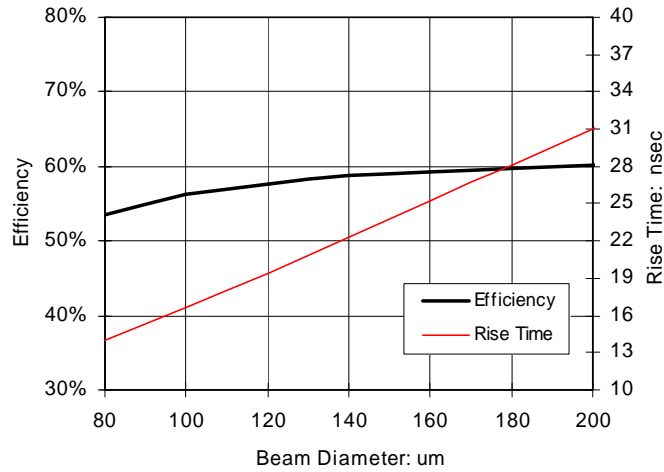

OUTLINE DRAWING

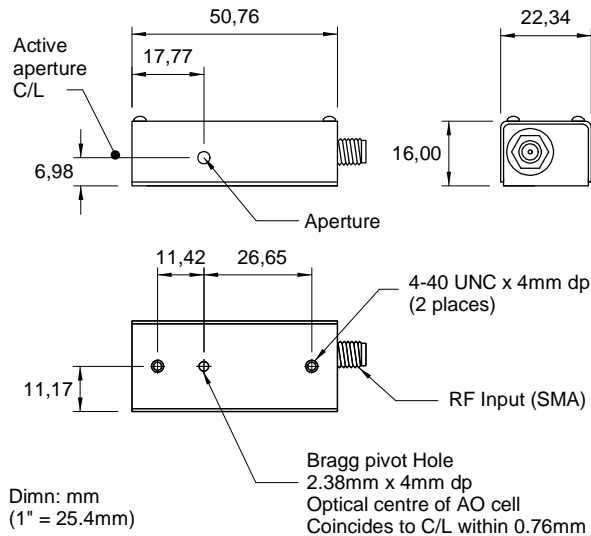

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.
In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding