

# D1135-T110L

## Acousto-Optic Modulator




0109

Compact AO Deflector designed for High Power Fibre and DPSS, NIR lasers. The unit incorporates four section acoustic beam steering to produce a flat scan response. Applications include high speed, sequential multi-point scanning or fast sweep operation.

### SPECIFICATIONS

Spectral Range:	0.36 > 1.5 $\mu$ m
Standard A/R Wavelengths:	1.1 $\mu$ m
Optical Power:	100 Watts **
Interaction Medium:	Tellurium Dioxide (TeO <sub>2</sub> )
Acoustic Velocity:	4.2mm/ $\mu$ s
Centre Frequency (Fc):	110MHz (nominal)
RF Bandwidth:	50MHz
Input Impedance:	50 $\Omega$ Nominal
VSWR:	<1.5:1 @ Fc
Clear Aperture:	6.5mm
Active Aperture Height:	3mm
Static Insertion Loss	<3% at 1.1 $\mu$ m
Reflectivity:	< 0.5%/Surface
Laser Polarization:	Any
RF Power (total):	6 Watts nominal
Bragg Angle:	15 mrad
Typical Scan Angle:	13 mrad
Cooling:	Water cooled base plate Corrosion inhibitor strongly recommended Thermal interlock switch opens at 40degC

### TYPICAL SCAN PERFORMANCE at 1.1 $\mu$ m \*

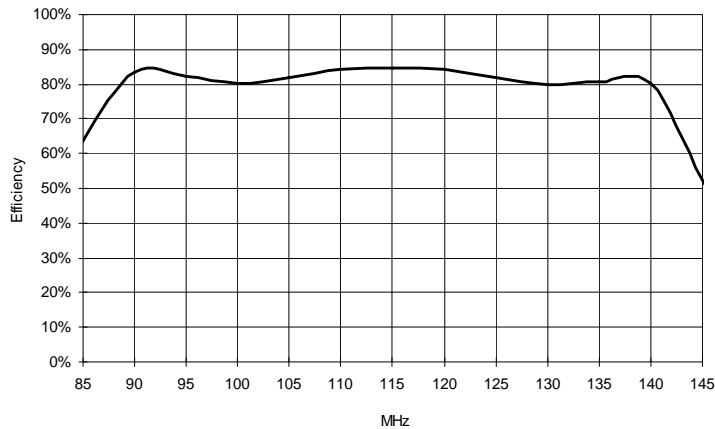

\* Single mode input

\*\* For higher powers please contact Isomet

**ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE**

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.


Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM)

Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

**Quality Assured.**

**In-house: Crystal Growth,  
Optical Polishing,  
A/R coating, Vacuum Bonding**



# D1135-T110L


## Acousto-Optic Modulator



0109

### OUTLINE DRAWING

Dimensions: Inches

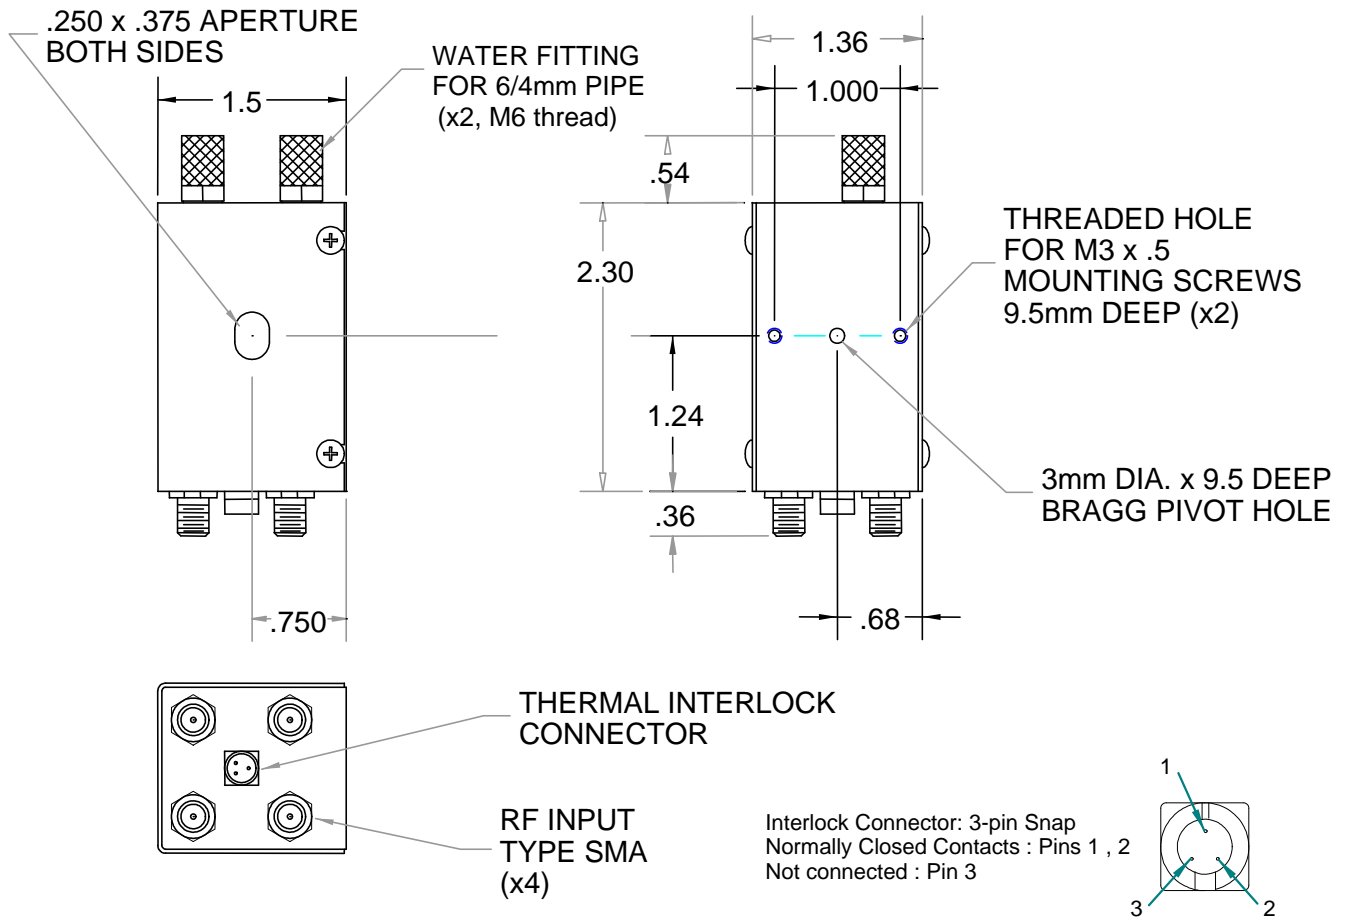

### Recommended Driver

Model RFA3110-4BS

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: [ISOMET@ISOMET.COM](mailto:ISOMET@ISOMET.COM) Web Page: [WWW.ISOMET.COM](http://WWW.ISOMET.COM)

Quality Assured.  
In-house: Crystal Growth,  
Optical Polishing,  
A/R coating, Vacuum Bonding