

D1312-T80L-6

Acousto-Optic Deflector

(PRELIMINARY)




0613

Compact AO Deflector designed for High Power Fibre and DPSS, NIR lasers. The unit incorporates two section acoustic beam steering to produce a flat scan response. Applications include high speed, sequential multi-point scanning or fast sweep operation.

SPECIFICATIONS

Spectral Range:	0.36 > 1.5 μ m
Standard A/R Wavelengths:	1.064 -1.1 μ m
Optical Power:	200 Watts **
Interaction Medium:	Tellurium Dioxide (TeO ₂)
Acoustic Velocity:	4.2mm/ μ s
Centre Frequency (Fc):	80MHz (nominal)
RF Bandwidth:	30MHz
Input Impedance:	50 Ω Nominal
VSWR:	<1.5:1 @ Fc
Clear Aperture:	8mm
Active Aperture Height:	6mm
Static Insertion Loss	<3% at 1.1 μ m
Reflectivity:	< 0.5%/Surface
Laser Polarization:	Any
RF Power (total):	7.5 Watts nominal
Bragg Angle:	10.2 mrad
Typical Scan Angle:	7.7 mrad
Cooling:	Water cooled Corrosion inhibitor strongly recommended Thermal interlock switch opens at 40degC

TYPICAL SCAN PERFORMANCE at 1.1 μ m *

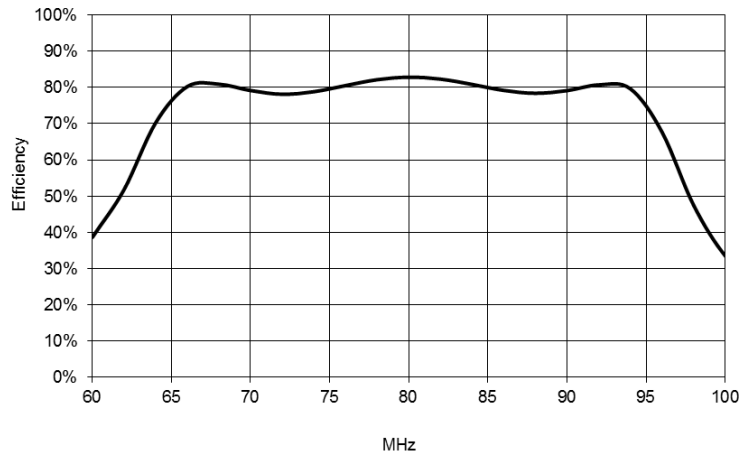

* Single mode input

** For higher powers please contact Isomet

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

**In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding**



D1312-T80L-6


Acousto-Optic Deflector (PRELIMINARY)



0613

OUTLINE DRAWING

Dimensions: mm
Case material: Aluminium (standard) or Tellurium Copper (option -TC)

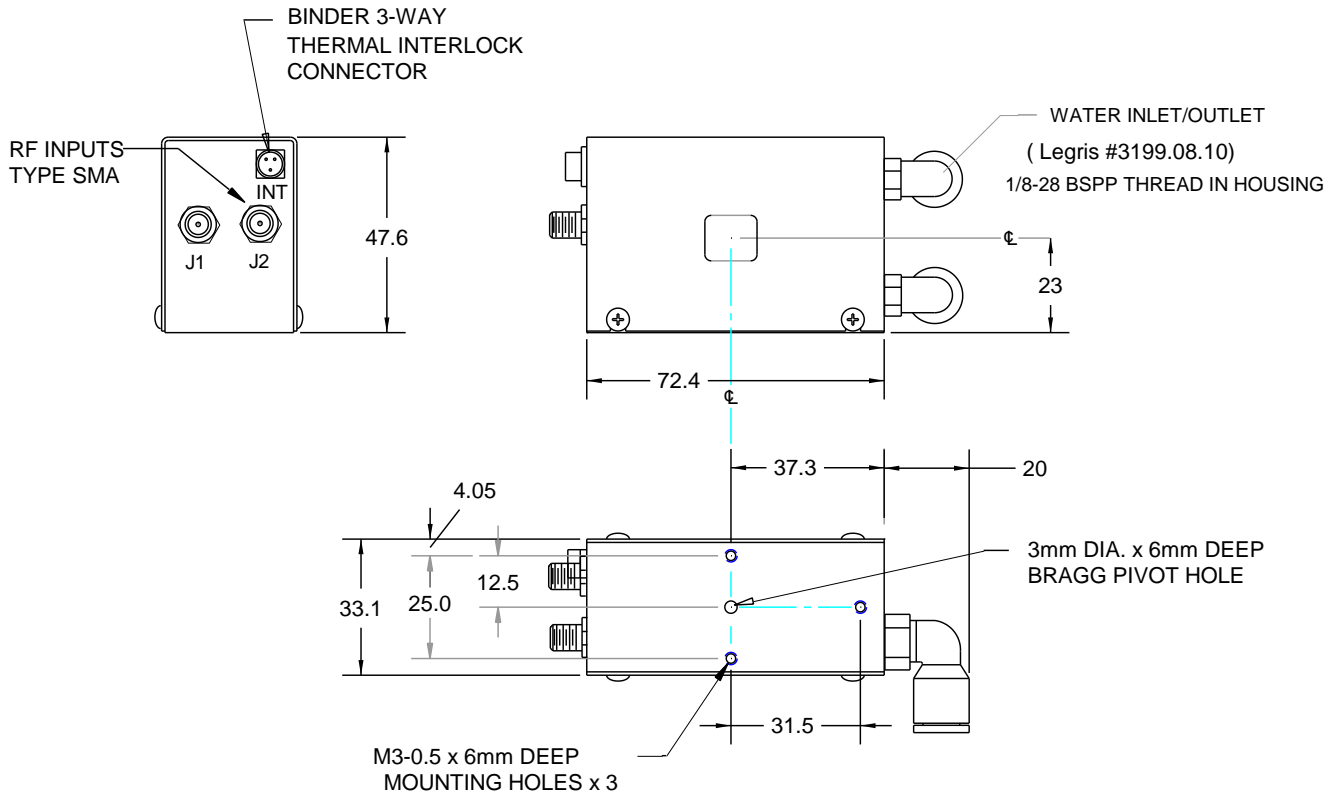

Recommended Driver(s)

Model RFA3080-2BS (Water cooled)

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

ISOMET CORP, 5263 Port Royal Rd, Springfield, VA 22151, USA.

Tel: (703) 321 8301 Fax: (703) 321 8546

E-mail: ISOMET@ISOMET.COM Web Page: WWW.ISOMET.COM

Quality Assured.

In-house: Crystal Growth,
Optical Polishing,
A/R coating, Vacuum Bonding